



FLEXIBLE LIGHTWEIGHT LED WALLS

Engineered with advanced materials for installation ease.
Tough, rugged, ready to fly, and IP65 for outdoor use.

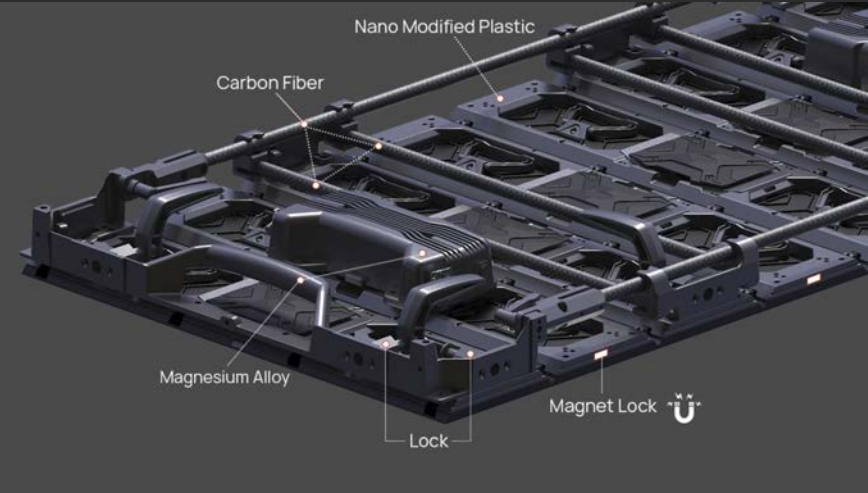


FREEDOM TO CREATE EXCITING SHAPES

HORIZONTAL OR VERTICAL ORIENTATION

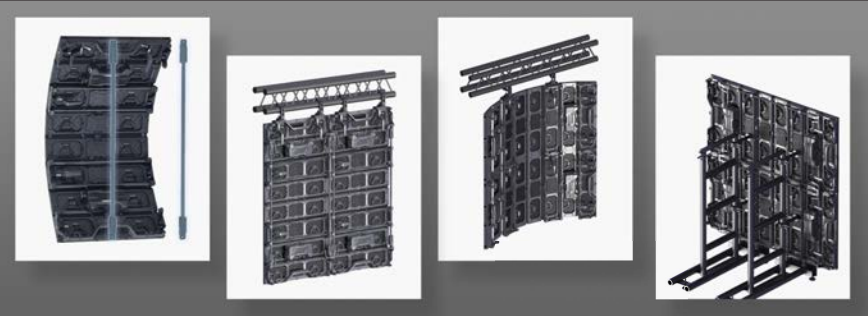

HANGING, STANDING, CURVED, OR FLAT CONFIGURATIONS

	CFO 2	CFO 3	CFO4
Pixel Pitch	2.88mm	3.75mm	4.68mm
Standard LED Type	SMD1515	SMD1921	
Pixel Configuration	1R1G1B		
Module Size	300 x 150 mm		
Module Resolution	104 x 52 px	80 x 40 px	64 x 32
Density (dots/ m²)	120,178	71,112	45,512
Optimal Viewing Distance	3.5m	4.5m	6.0m
Cabinet Size (HxWxD)	800 x 1200 x 25 mm		
Cabinet Resolution	208 x 416 px	160 x 320 px	125 x 256 px
Cabinet Configuration	8-Panel Segments with 7 Articulating Hinges		
Hinge Movement Range	+90° Convex / -3° Concave		
Cabinet Material	Carbon Fiber / Magnesium Alloy / PC		
Cabinet Weight	17.5 kg (38.5 lbs) / 24 kg/ m²		
Installation	Hanging Bar or Ground Support		
Max Hanging Quantity	Vertical: 8 Panels - Horizontal: 10 Panels		
Max Stacking Quantity	10 Panels Horizontally		
Maintenance	Front or Rear		
Viewing Angle	160° / 140°		
Operating Temperature	-20°C to +50°C		
IP Rating	IP65 Outdoor		
Input Power	110 - 240Vac, 50/60 Hz		
Max Consumption	620 W/ m²		
Avg Consumption	210 W/ m²		
Gray Scale	14 bit		
Frame Refresh	50 / 60 Hz		
Data Refresh	≥3840 Hz		≥4920 Hz
Brightness	3500/4500 nits	3500/5000 nits	
Scan Mode	1/26	1/20	1/16
LED Lifetime	≥ 100,000 hours		
Certifications	CE, FCC, CSA SPE1000		

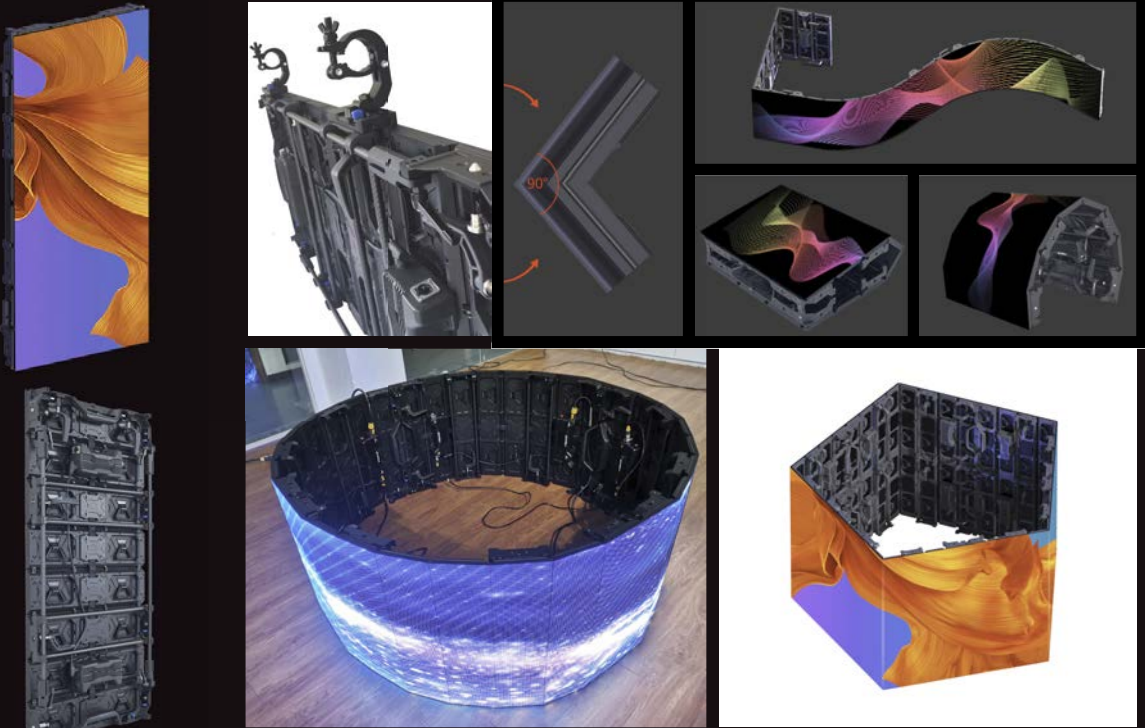

ULTRA-BRIGHT FOR OUTDOOR USE

lumiosled.com

more info on our website