



GLORY


series




SEMI TRANSPARENT OUTDOOR LED VIDEO WALL SYSTEM

 11kg LIGHT WEIGHT  HIGH TRANSPERANCY $\rightarrow | 2:1 | \leftarrow$ PIXEL RATIO

LumiOSLED.com
DESIGNED AND ENGINEERED IN

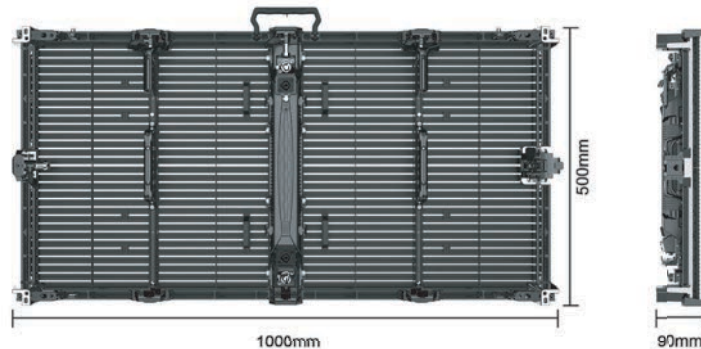Four corner protectors



$\pm 10^\circ$ arc lock



Ergonomic design handle

One Screen Two Solutions

Both transparent and non-transparent scenes, and supports high-brightness options.
It can be used in indoor, outdoor, skylight and other scenes.





Non-transparent



Transparent light

Transparency Mode Switch

Flip up to turn off transparency, flip down to turn on transparency.



LumiOSLED.com




LumiOS GLORY

TECHNICAL SPECIFICATION

	GL39
Pixel Pitch	3.9mm Horz X 7.8mm Vert
Pixel Configuration	1R1G1B
Size of Module	500 x 250mm
Resolution of Module	128 x 132 px
Density (dots/m ²)	32,768
Size of Cabinet (HxWxD)	1000mm x 500 x 90mm
Cabinet Resolution	256 x 64 px
Cabinet Material	Die Cast Aluminum
Weight of Cabinet	10.5 kg (23.15 lbs)
Transparency	45%
Maintenance	Front or Rear
Install Type	Hanging Bar or Ground Support
Cabinet Angles	0° (flat), 2.5°/ 5°/ 7.5°/ 10° Convex or Concave
IP Rating	IP65
Power Input	110/220 Vac (+/- 10%), 47-63 Hz
Max Consumption	800 W/m ²
Avg Consumption	260 W/m ²
Color Temperature	3,000-10,000°K
Data Refresh	≥3840 Hz
Brightness	4500 - 5000 cd/m ²
Brightness Control	256 Grade
LED Lifetime	≥ 100,000 Hours
Certifications	CE, FCC, CSA SPE1000


DESIGNED FOR BOTH FRONT AND REAR MAINTANANCE



FLIGHT CASES with
interconnecting data and
power cables included.

Rigging Fly Bars and
Ground Support Systems
are available option.

ADVANCED THERMAL FLOW SYSTEM

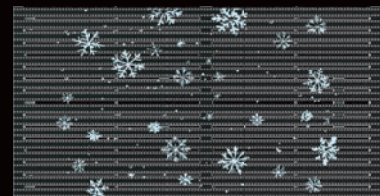

- Unique heat path design delivers uniform LED cooling for stable images and longer LED lifespan.
- Designed for Canada's extreme climate, exceptionally rugged, tour-ready, purpose-built for the elements.
- Built to electrical code CSA 22.2, SPE1000 field inspected, certified, and marked for compliance.

LumiOSLED.com
DESIGNED AND ENGINEERED IN
