


- SMALL CABINETS FOR PRECISE FIT
- 4 CABINET SIZE OPTIONS
- SPACE SAVING ULTRA-THIN PROFILE
- WIDE COLOR RANGE 3,000 - 10,000K
- CORNER AND CURVED OPTIONS
- DIE-CAST ALUMINUM FOR DURABILITY AND SUPERIOR HEAT DISSIPATION



	<i>GOKU PRO 15</i>	<i>GOKU PRO 19</i>	<i>GOKU PRO 26</i>	<i>GOKU PRO 39</i>
Pixel Pitch	1.5mm	1.9mm	2.6mm	3.9mm
LED Type	SMD1010/1515	SMD1010/1515	SMD1515	SMD2020
Pixel Configuration	1R1G1B			
Size of Module	250 x 250mm			
Resolution of Module	160 x 160 px	128 x 128 px	96 x 96 px	64 x 64 px
Density (dots/m²)	409,600	262,144	147,456	65,536
Size of Cabinet (HxWxD)	250mm x 500 / 750 / 1000 x 43mm + 500 x 1000 x 43mm			
Cabinet Resolution 500x250mm	160 x 320 px	128 x 256 px	96 x 192 px	64 x 128 px
Cabinet Resolution 750x250mm	160 x 480 px	128 x 384 px	96 x 288 px	64 x 152 px
Cabinet Resolution 1000x250mm	160 x 640 px	128 x 512 px	96 x 384 px	64 x 256 px
Cabinet Resolution 1000x500mm	320 x 800 px	256 x 640 px	192 x 480 px	128 x 320 px
Cabinet Material	Die Cast Aluminum			
Weight of Cabinet	250x... 500mm 3.0 kg / 750mm 4.2 kg / 1000mm 5.5 kg + 1000x500mm 11 kg			
Support Hanging	Yes			
Support Front Service	Yes			
Max Consumption	450 W/m² (250mm tall) / 540 W/m² (500mm tall)			
Avg Consumption	150 W/m² (250mm tall) / 250 W/m² (500mm tall)			
Gray Scale	14 -16bits			
Color Temperature	3,000-10,000 °K			
Driving Method	1/128	1/64	1/32	1/16
Refresh Frequency	≥3840 Hz			
Brightness	700 cd/m²	800 cd/m²	800 cd/m²	800 cd/m²
Brightness Control	256 Grade			
IP Grade	IP30			
Certifications	CE, FCC, cETLus			

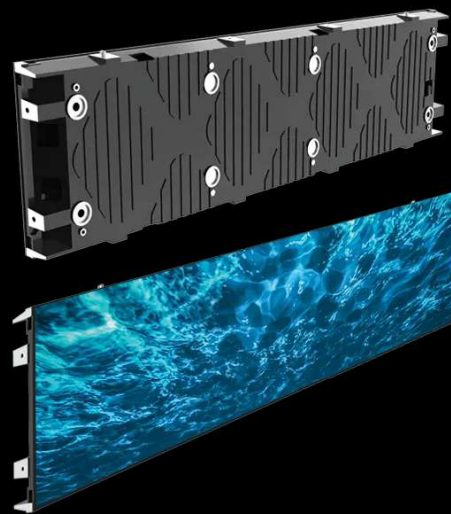